

# Huawei AP2010DN Brochure-Detailed



# Huawei AP2010DN Brochure-Detailed



Huawei wall plate AP2010DN uses a standard 86-mm plate and can be easily installed in a junction box, without affecting interior room space or appearance. It is well designed with built-in antennas, a hidden indicator, and a sliding panel.

The AP2010DN provides comprehensive service support capabilities and features high security, simple network deployment, automatic AC discovery and configuration, and real-time management and maintenance.



## Huawei AP2010DN Access Point

- 2.4 GHz or 5 GHz frequency bands
- Compatibility with IEEE 802.11a/b/g/n

## Huawei AP2010DN offers the following advantages:

- Various types of ports, including one uplink GE port, two downlink 100M ports, and a phone port, particularly applicable to hotels, apartments, and offices.
- High-speed and reliable wireless access services: supports 802.11n Beamforming and uses the latest 802.11n chip to achieve higher performance and wider coverage.
- Comprehensive user access control capability: implements user access control based on user group policies and supports a maximum of 128 users.
- High network security: supports multiple authentication and encryption modes, as well as rogue AP and STA detection.
- Flexible networking and strong environment adaptability: automatically adjusts transmission rate, channel, transmit power, and bandwidth to adapt to various environments, and supports identification, location, and display of interference sources of more than eight types.
- Easy management and maintenance: supports plug-and-play (PnP) and works with NMS to implement remote configuration and fast fault location.

## Product Features

- Recommended for environments with densely distributed small rooms, such as hotels, dormitories, hospitals, and offices
- 2 x 2 Multiple-Input Multiple-Output (MIMO) technology with a maximum rate of 300 Mbit/s for each radio
- Spectrum analysis
- Wireless Intrusion Detection System (WIDS)/Wireless Intrusion Prevention System (WIPS)
- Auto Radio
- High Density Boost
- User Awareness
- Fast roaming without service interruption
- Beamforming
- IPv6 support
- Batch upgrade
- Pass-through wired port: users can connect to a wired port to access the Internet when wireless connections are unavailable


## Scalability

When coupled with access controllers (ACs) and Network Management Systems (NMSs), Huawei 802.11n APs can implement real-time monitoring, intelligent Radio Frequency (RF) management, spectrum analysis, wireless positioning, load balancing, roaming, security policy control, wired/wireless network integration, as well as Bring Your Own Device (BYOD) network security control and a smart access strategy. The AC + Fit AP architecture is highly scalable and supports centralized management of multiple Fit APs on a single AC. Software upgrade technologies allow users to seamlessly add and upgrade APs without incurring additional administrative or equipment expense.

## Typical Networking

The following figure shows typical AP2010DN networking.

### Wall plate AP networking

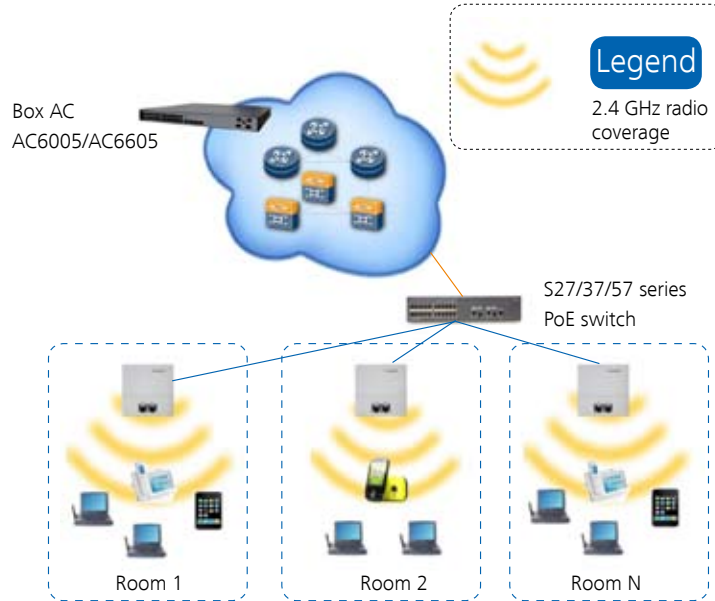


The wall plate AP2010DN functions as a Fit AP on the network and provides data forwarding functions. An AC implements user access, AP management, authentication, routing, security, and Quality of Service (QoS).

## Basic Specifications

| Item                         | Specifications            |   |
|------------------------------|---------------------------|---|
| Technical specifications     | Dimensions (W x D x H)    | 86 mm x 86 mm x 45 mm                               |
|                              | Weight                    | ≤ 0.2 kg  |
|                              | System memory             | 128 MB  |
| Power specifications         | Power input               | PoE power supply in compliance with IEEE 802.3af/at |
|                              | Maximum power consumption | 5.5W  |
| Environmental specifications | Operating temperature     | 0°C to +40°C  |
|                              | Storage temperature       | -40°C to +70°C                                      |
|                              | Operating humidity        | 5% to 95% (non-condensing)                          |
|                              | Altitude                  | -60 m to 4,000 m                                    |
|                              | Atmospheric pressure      | 70 kPa to 106 kPa                                   |

## Radio Specifications

| Item                    | Description  |
|-------------------------|--|
| Antenna type            | Built-in antennas  |
| Antenna gain            | 2.4 GHz: 2 dBi<br>5 GHz: 2.5 dBi   |
| Maximum number of users | ≤ 128  |
| Maximum transmit power  | 16 dBm<br> NOTE<br>The actual transmit power depends on local laws and regulations. |
| Power increment         | 1 dBm  |
| Receiver sensitivity    | 802.11b (CCK): -96 dBm @ 1 Mb/s; -88 dBm @ 11Mb/s  |
|                         | 802.11g (non-HT20): -91 dBm @ 6 Mb/s; -74 dBm @ 54 Mb/s  |
|                         | 802.11n (HT20): -91 dBm @ MCS0; -71 dBm @ MCS15  |
|                         | 802.11n (HT40): -88 dBm @ MCS0; -68 dBm @ MCS15  |

## Product Features

|               |   |
|---------------|---|
| WLAN features | <p>Compliance with IEEE 802.11a/b/g/n</p> <p>Maximum rate: 300 Mbit/s</p> <p>Maximum ratio combining (MRC)</p> <p>Maximum likelihood detection (MLD)</p> <p>Data unit aggregation, including A-MPDU (Tx/Rx) and A-MSDU (Rx only)</p> <p>802.11 dynamic frequency selection (DFS)</p> <p>Short guard interval (GI)</p> <p>Priority mapping and packet scheduling based on a Wi-Fi Multimedia (WMM) profile to implement priority-based data processing and forwarding</p> <p>Automatic and manual rate adjustment (the rate is adjusted automatically by default)</p> <p>WLAN channel management and channel rate adjustment</p> <p>Automatic channel scanning and interference avoidance</p> <p>Service Set Identifier (SSID) hiding</p> <p>Signal Sustain Technology (SST)</p> <p>Unscheduled Automatic Power Save Delivery (U-APSD)</p> <p>Control and Provisioning of Wireless Access Points (CAPWAP)</p> <p>Automatic access in Fit AP mode</p> |
|---------------|---|

|                      |   |
|----------------------|---|
| Network features     | <p>Compliance with IEEE 802.3u</p> <p>Auto-negotiation of the rate and duplex mode and automatic switchover between the Media Dependent Interface (MDI) and Media Dependent Interface Crossover (MDI-X)</p> <p>SSID-based VLAN assignment</p> <p>VLAN trunk on uplink Ethernet ports</p> <p>4094 VLAN IDs (1-4094) and a maximum of 8 Virtual APs (VAPs) for each radio</p> <p>AP control channel in tagged and untagged mixed mode</p> <p>DHCP client, obtaining IP addresses through DHCP</p> <p>Tunnel forwarding and direct forwarding</p> <p>STA isolation in the same VLAN</p> <p>Access Control Lists (ACLs)</p> <p>Link Layer Discovery Protocol (LLDP)</p> <p>Service holding upon CAPWAP link disconnection in direct forwarding</p> <p>Unified authentication on the AC</p> <p>AC dual-link backup</p> |
| QoS Features         | <p>Priority mapping and packet scheduling based on a WMM profile to implement priority-based data processing and forwarding</p> <p>WMM parameter management for each radio</p> <p>WMM power saving</p> <p>Priority mapping for upstream packets and flow-based mapping for downstream packets</p> <p>Queue mapping and scheduling</p> <p>User-based bandwidth limiting</p> <p>Adaptive bandwidth management (the system dynamically adjusts bandwidth allocation based on the user quantity and environment to improve user experience)</p>   |
| Security features    | <p>Open system authentication</p> <p>WEP authentication/encryption</p> <p>WPA/WPA2-PSK authentication and encryption</p> <p>WPA/WPA2-802.1x authentication and encryption</p> <p>WAPI authentication and encryption</p> <p>WIDS including rogue AP and STA detection, attack detection, STA/AP blacklist and whitelist</p>  |
| Maintenance features | <p>Unified management and maintenance on the AC</p> <p>Plug-and-Play (PnP) in Fit AP mode: automatic access and configuration loading</p> <p>Batch upgrade</p> <p>Local AP management using Telnet</p> <p>Real-time configuration monitoring and fast fault location using the NMS</p> <p>System status alarm</p>   |
| BYOD                 | <p>Identifies the device type according to the Organizationally Unique Identifier (OUI) in the MAC address.</p> <p>Identifies the device type according to the User Agent (UA) information in an HTTP packet.</p> <p>Identifies the device type according to DHCP options.</p> <p>The RADIUS server delivers packet forwarding, security, and QoS policies according to the device type carried in the RADIUS authentication and accounting packets.</p>  |
| Spectrum analysis    | <p>Identifies interference sources such as Bluetooth devices, microwave ovens, cordless phones, ZigBee devices, wireless game controllers, 2.4 GHz/5 GHz wireless video and audio devices, and baby monitors.</p> <p>Works with the Huawei eSight system to locate and perform spectrum analysis on interference sources.</p>   |

## Standards Compliance

|                         |  |
|-------------------------|--|
| Safety standards        | <ul style="list-style-type: none"> <li>UL 60950-1</li> <li>CAN/CSA 22.2 No.60950-1</li> <li>IEC 60950-1</li> <li>EN 60950-1</li> <li>GB 4943</li> </ul>  |
| Radio standards         | <ul style="list-style-type: none"> <li>ETSI EN 300 328</li> <li>ETSI EN 301 893</li> <li>FCC Part 15C: 15.247</li> <li>FCC Part 15C: 15.407</li> <li>RSS-210</li> <li>AS/NZS 4268</li> </ul>   |
| EMC standards           | <ul style="list-style-type: none"> <li>EN 301.489-1</li> <li>EN 301.489-17</li> <li>ETSI EN 60601-1-2</li> <li>FCC Part 15</li> <li>ICES-003</li> <li>YD/T 1312.2-2004</li> <li>ITU k.20</li> <li>GB 9254</li> <li>GB 17625.1</li> <li>AS/NZS CIPSR22</li> <li>EN 55022</li> <li>EN 55024</li> <li>CISPR 22</li> <li>CISPR 24</li> <li>IEC61000-4-6</li> <li>IEC61000-4-2</li> </ul> |
| IEEE standards          | <ul style="list-style-type: none"> <li>IEEE 802.11a/b/g</li> <li>IEEE 802.11n</li> <li>IEEE 802.11h</li> <li>IEEE 802.11d</li> <li>IEEE 802.11e</li> </ul>   |
| Security standards      | <ul style="list-style-type: none"> <li>802.11i, Wi-Fi Protected Access 2 (WPA2), and WPA</li> <li>802.1X</li> <li>Advanced Encryption Standards (AES) and Temporal Key Integrity Protocol (TKIP)</li> <li>EAP Type (s)</li> </ul>  |
| Environmental standards | <ul style="list-style-type: none"> <li>ETSI 300 019-2-1</li> <li>ETSI 300 019-2-2</li> <li>ETSI 300 019-2-3</li> <li>ETSI 300 019-1-1</li> <li>ETSI 300 019-1-2</li> <li>ETSI 300 019-1-3</li> </ul>   |

|       |   |
|-------|---|
| EMF   | CENELEC EN 62311<br>CENELEC EN 50385<br>OET65<br>RSS-102<br>FCC Part1&2<br>FCC KDB series |
| RoHS  | Directive 2002/95/EC & 2011/65/EU   |
| Reach | Directive 1907/2006/EC  |
| WEEE  | Directive 2002/96/EC & 2012/19/EU   |

## Professional Service and Support

Huawei WLAN planning tools deliver expert network design and optimization services using the most professional simulation platform in the industry. Backed by fifteen years of continuous investment in wireless technologies, extensive network planning and optimization experience, as well as rich expert resources, Huawei helps customers:

- Design, deploy, and operate a high-performance network that is reliable and secure.
- Maximize return on investment and reduce operating expenses.

## More Information

For more information, please visit <http://e.huawei.com> or contact your local Huawei office.



Enterprise Services



Product Overview





Marketing Documentation

**Copyright © Huawei Technologies Co., Ltd. 2014. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

**Trademark Notice**

 , HUAWEI, and  are trademarks or registered trademarks of Huawei Technologies Co., Ltd. Other trademarks, product, service and company names mentioned are the property of their respective owners.

**General Disclaimer**

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.

HUAWEI TECHNOLOGIES CO.,LTD.  
Huawei Industrial Base  
Bantian Longgang  
Shenzhen 518129,P.R.China  
Tel: +86 755 28780808

[www.huawei.com](http://www.huawei.com)